



A


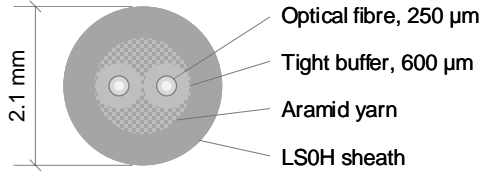


B

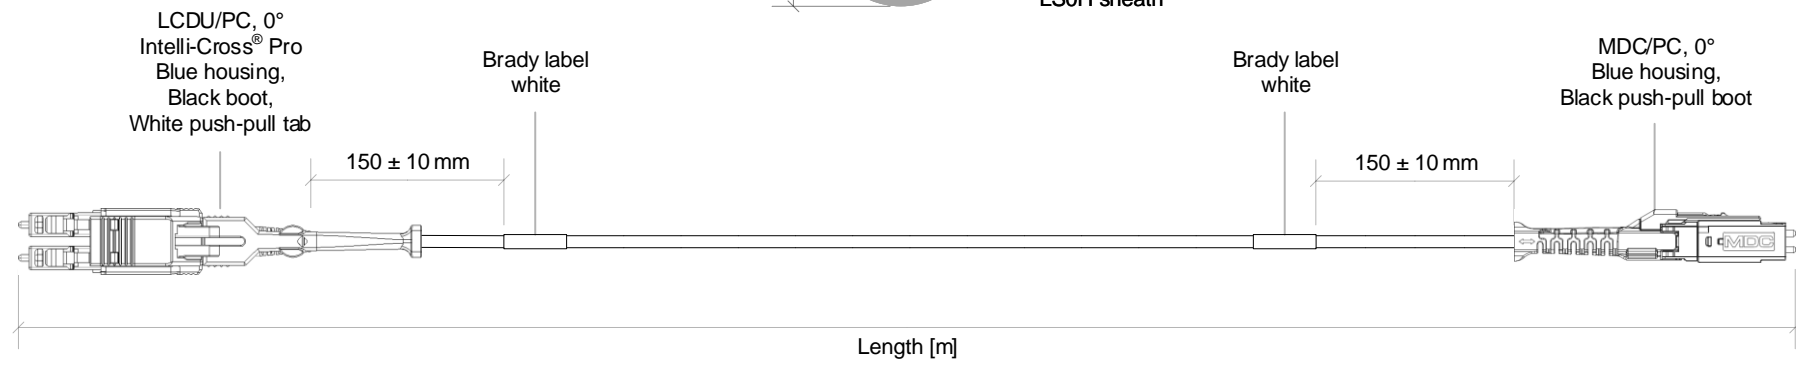

C

D



LCDU connector

Type	IL mean [dB]	IL max. [dB]	RL mean [dB]	RL min. [dB]
SM/PC	0.12	0.25	55	50

MDC connector

Type	IL mean [dB]	IL max. [dB]	RL mean [dB]	RL min. [dB]
SM/PC	0.12	0.25	55	55

E A to B

Fibre colour	Side A	Side B
Red	A	B
Green	B	A

Cable description	CPR class	Sheath colour	Sheath Ø [mm]
FO Indoor Uniboot 1x2 G.652.D BLO / J-V(ZN)H	-	Yellow	2.1

F

Art. No.	Description	Polarity	Length [m]
42301000ZY	DAX LCU/PC -MDC/PC 01M0H-RDGE-OS2	A to B	1.0
42301100ZY	DAX LCU/PC -MDC/PC 02M0H-RDGE-OS2	A to B	2.0
42301200ZY	DAX LCU/PC -MDC/PC 03M0H-RDGE-OS2	A to B	3.0
42301300ZY	DAX LCU/PC -MDC/PC 04M0H-RDGE-OS2	A to B	4.0
42301400ZY	DAX LCU/PC -MDC/PC 05M0H-RDGE-OS2	A to B	5.0
42301500ZY	DAX LCU/PC -MDC/PC xxMxH-RDGE-OS2	A to B	xx.x

Note: Some items in different lengths may not have been included in this table.

<p>Dätwyler IT Infra, itinfra.datwyler.com</p>			Description DCS patch cable, LCDU/PC-MDC/PC, G.652.D BLO, A to B						
Drawn	Philipp Bless	01.09.2023	Datwyler description		-				
Checked	André Jaun	05.09.2023	Size	Scale	Article number	Drawing number	Revision	Page	
Approved	Kai Wirkus	08.09.2023	A4	-	According to table	10000298792	00	1 of 1	