


Brady label
1: length [m]
2: n x connector type
3: fibre type

L=25m
4xLCD/PC
G50 OM4

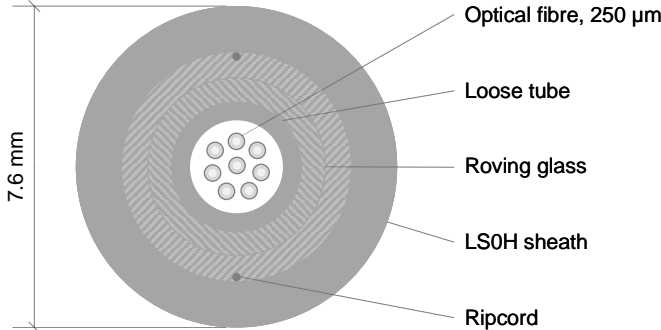


Colour code DIN (IEC 60304)

Fibres												Tubes		
1	2	3	4	5	6	7	8	9	10	11	12	1	2	...
RD	GN	BU	YE	WH	GY	BN	VT	TQ	BK	OG	PK	RD	GN	WH

Art. No.	Description	Connector type	Connector colour	Boot colour	Zero-fibre colour	IL mean [dB]	IL max. [dB]	RL mean [dB]	RL min. [dB]
49555400ZY	FO trunk cable, 4x LCD/APC, G.652.D, A to A, Dca	LCD/APC	Green	Green	Yellow	0.12	0.25	70	65
49555500ZY	FO trunk cable, 4x LCD/PC, G.652.D, A to A, Dca	LCD/PC	Blue	Blue	Yellow	0.12	0.25	55	50
49555600ZY	FO trunk cable, 4x LCD/PC, OM3, A to A, Dca		Beige	Beige	Turquoise	0.15	0.25	35	30
49555700ZY	FO trunk cable, 4x LCD/PC, OM4, A to A, Dca				Heather violet				

Note: This list may not show all existing articles.

Art. No.	Cable description	CPR class	Sheath colour	Sheath Ø [mm]
19020500DZ	FO Universal-Z 1x8 E9 G.652.D GN / U-DQ(ZN)BH	Dca-s2,d1,a1	Green	7.6
18595900DZ	FO Universal-Z 1x8 G50 OM3 GN / U-DQ(ZN)BH			
18736300DZ	FO Universal-Z 1x8 G50 OM4 GN / U-DQ(ZN)BH			

<div>Dätwyler IT Infra, itinfra.datwyler.com</div> <div> DATWYLER</div>			<div>Description</div> <div>FO trunk cable, 4x LCD, G.652.D, OM3, OM4, A to A, Dca</div>						
Drawn	Philipp Bless	11.04.2025	Drawing name		DRW_FO TC_4LCD_A-A_D				
Checked	André Jaun	15.04.2025	Size	Scale	Article number	Document number	Revision	Page	
Approved	Kai Wirkus	17.04.2025	A3	-	According to table	-	00	1 of 1	